

YF-EXMT

Professional Emergency Lighting for Orientation



TECHNICAL SPECIFICATIONS

Product Code	YF-EXMT
Input Voltage	220-240 V AC
Maximum Power	5 W
Battery	1.2 V
Emergency Duration	1-3 Hours
Operating Frequency	50 - 60 Hz
Operating Temperature	-10 °C to +40 °C
Lamp Type	LED
Working Mode	Continually
Protection Class	IP20
Visible Distance	30 M

- Single or double faced
- High efficiency 18-LED system
- Green LED battery charge indicator
- High temperature resistant industrial grade 1.2 V DC Ni-Cd / Ni-MH battery
- Visibility range 30 meters
- Electrostatic powder coated DKP sheet metal body
- 2 mm flame retardant acrylic opal plexiglass
- Continuous, emergency or combined operating mode
- Direct surface ceiling mounting with chain, steel wire or rod
- Battery overcharge and discharge protection
- Screen printed or self adhesive opal labels in standard shapes
- Special size on request side lighting
- Tolerance to operating temperatures between -10 °C and +40 °C



APPLICATION AREAS



OFFICE



HOTEL



HOSPITAL




INDUSTRIAL

Ideal for all LED lighting systems used in offices, hotels, hospitals, and industrial facilities, ensuring safe evacuation during power outages.



DIMENSIONS

DIRECTLY TO THE CEILING

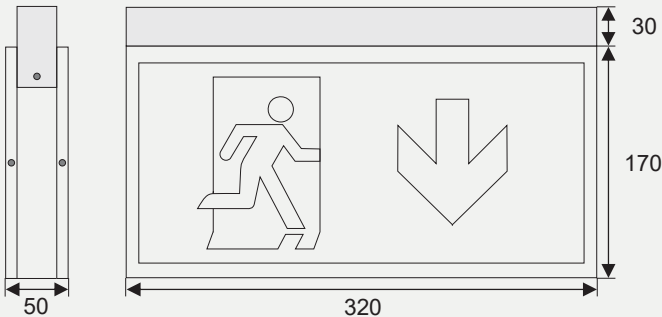

SUSPENSION WIRE

